

TRACKED EXCAVATOR | I45XR



OPERATING WEIGHT
14,750 - 18,871kg

ENGINE POWER
81kW (108hp)

BUCKET CAPACITY
0.21 – 0.89m³


MINIMUM SWING

The I45XR has a 27% shorter tailswing than the conventional I40X, making it ideal for work in confined urban sites and highways.



UNRESTRICTED WORKING

A reduced front swing and optional TAB boom allow for a 15.5% reduction of the total working envelope, making working in tight spaces even easier.

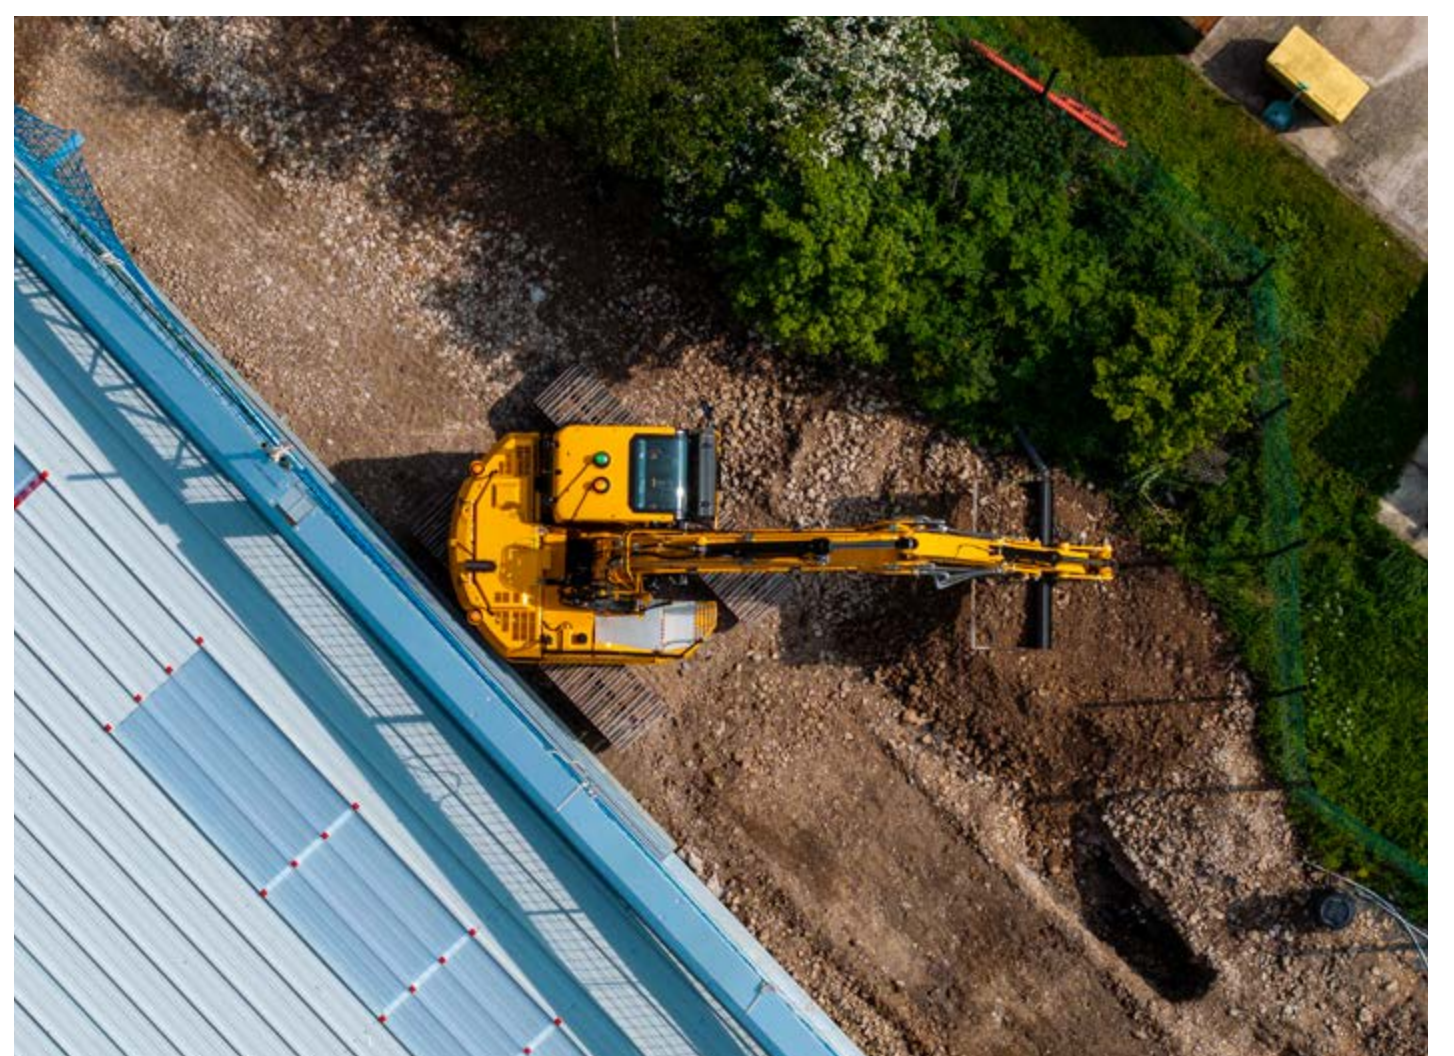


MAXIMUM SPACE

The new I45XR features the full-size CommandPlus cab, one of the biggest, most comfortable, quiet and easy to operate cabs on the market.



X
SERIES

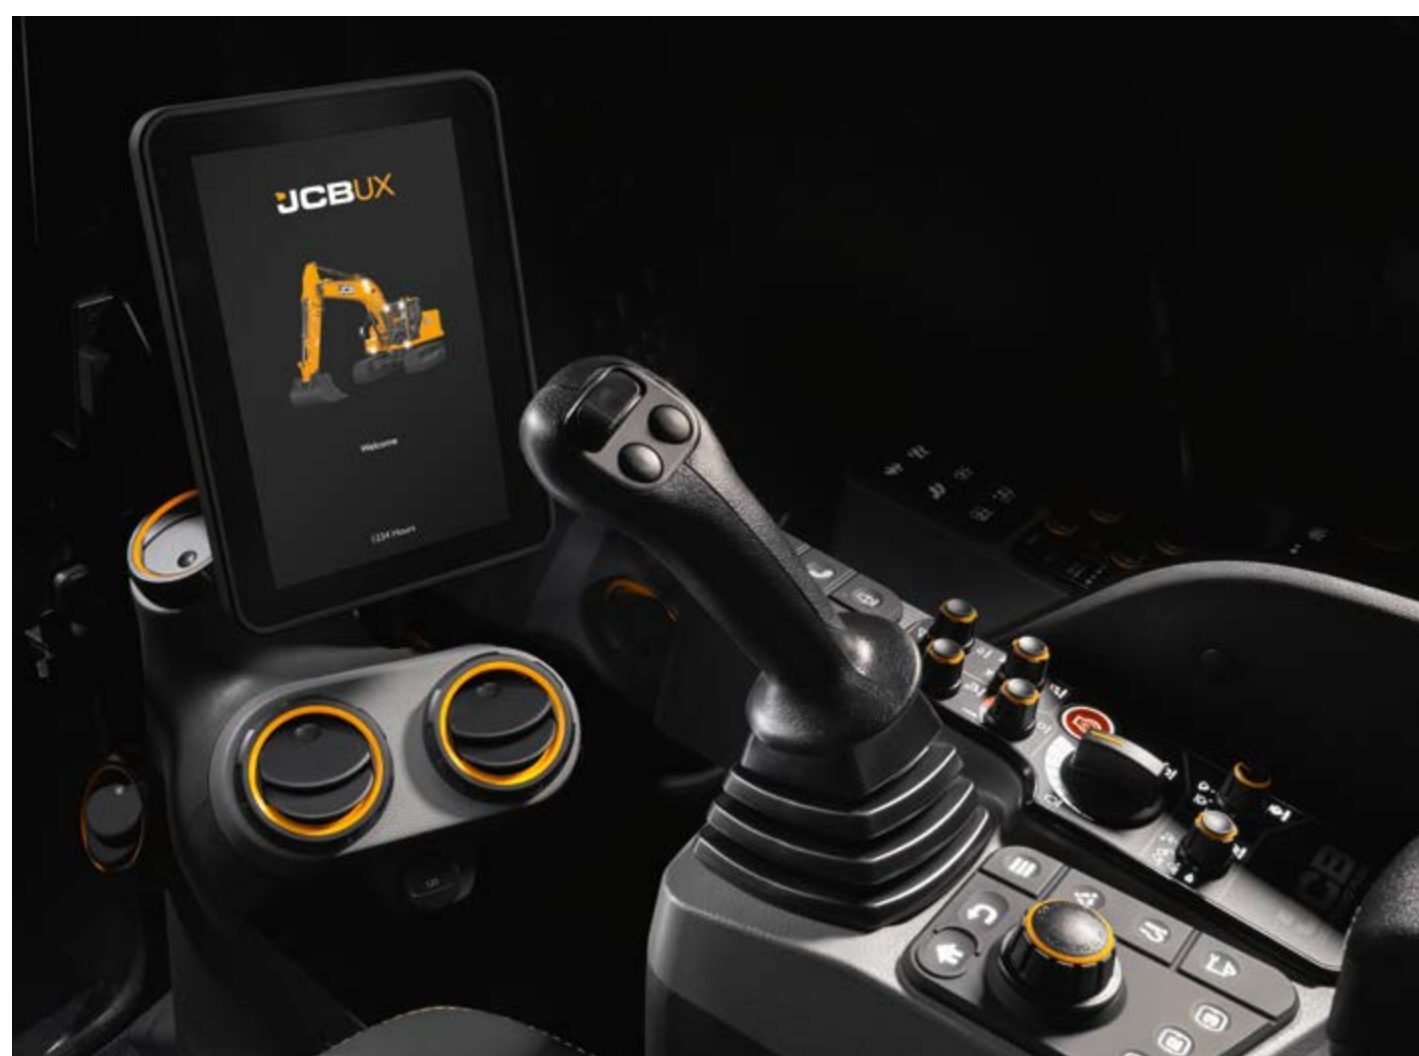

INTRODUCING JCB UX


A sleek and intuitive 10" touch screen display with customisable operator profiles and bespoke hotkeys.

EXTREME STRENGTH

It's taken extensive hydraulic, electrical and structural development and testing to build a machine that doesn't just look strong, but is strong.



X
SERIES

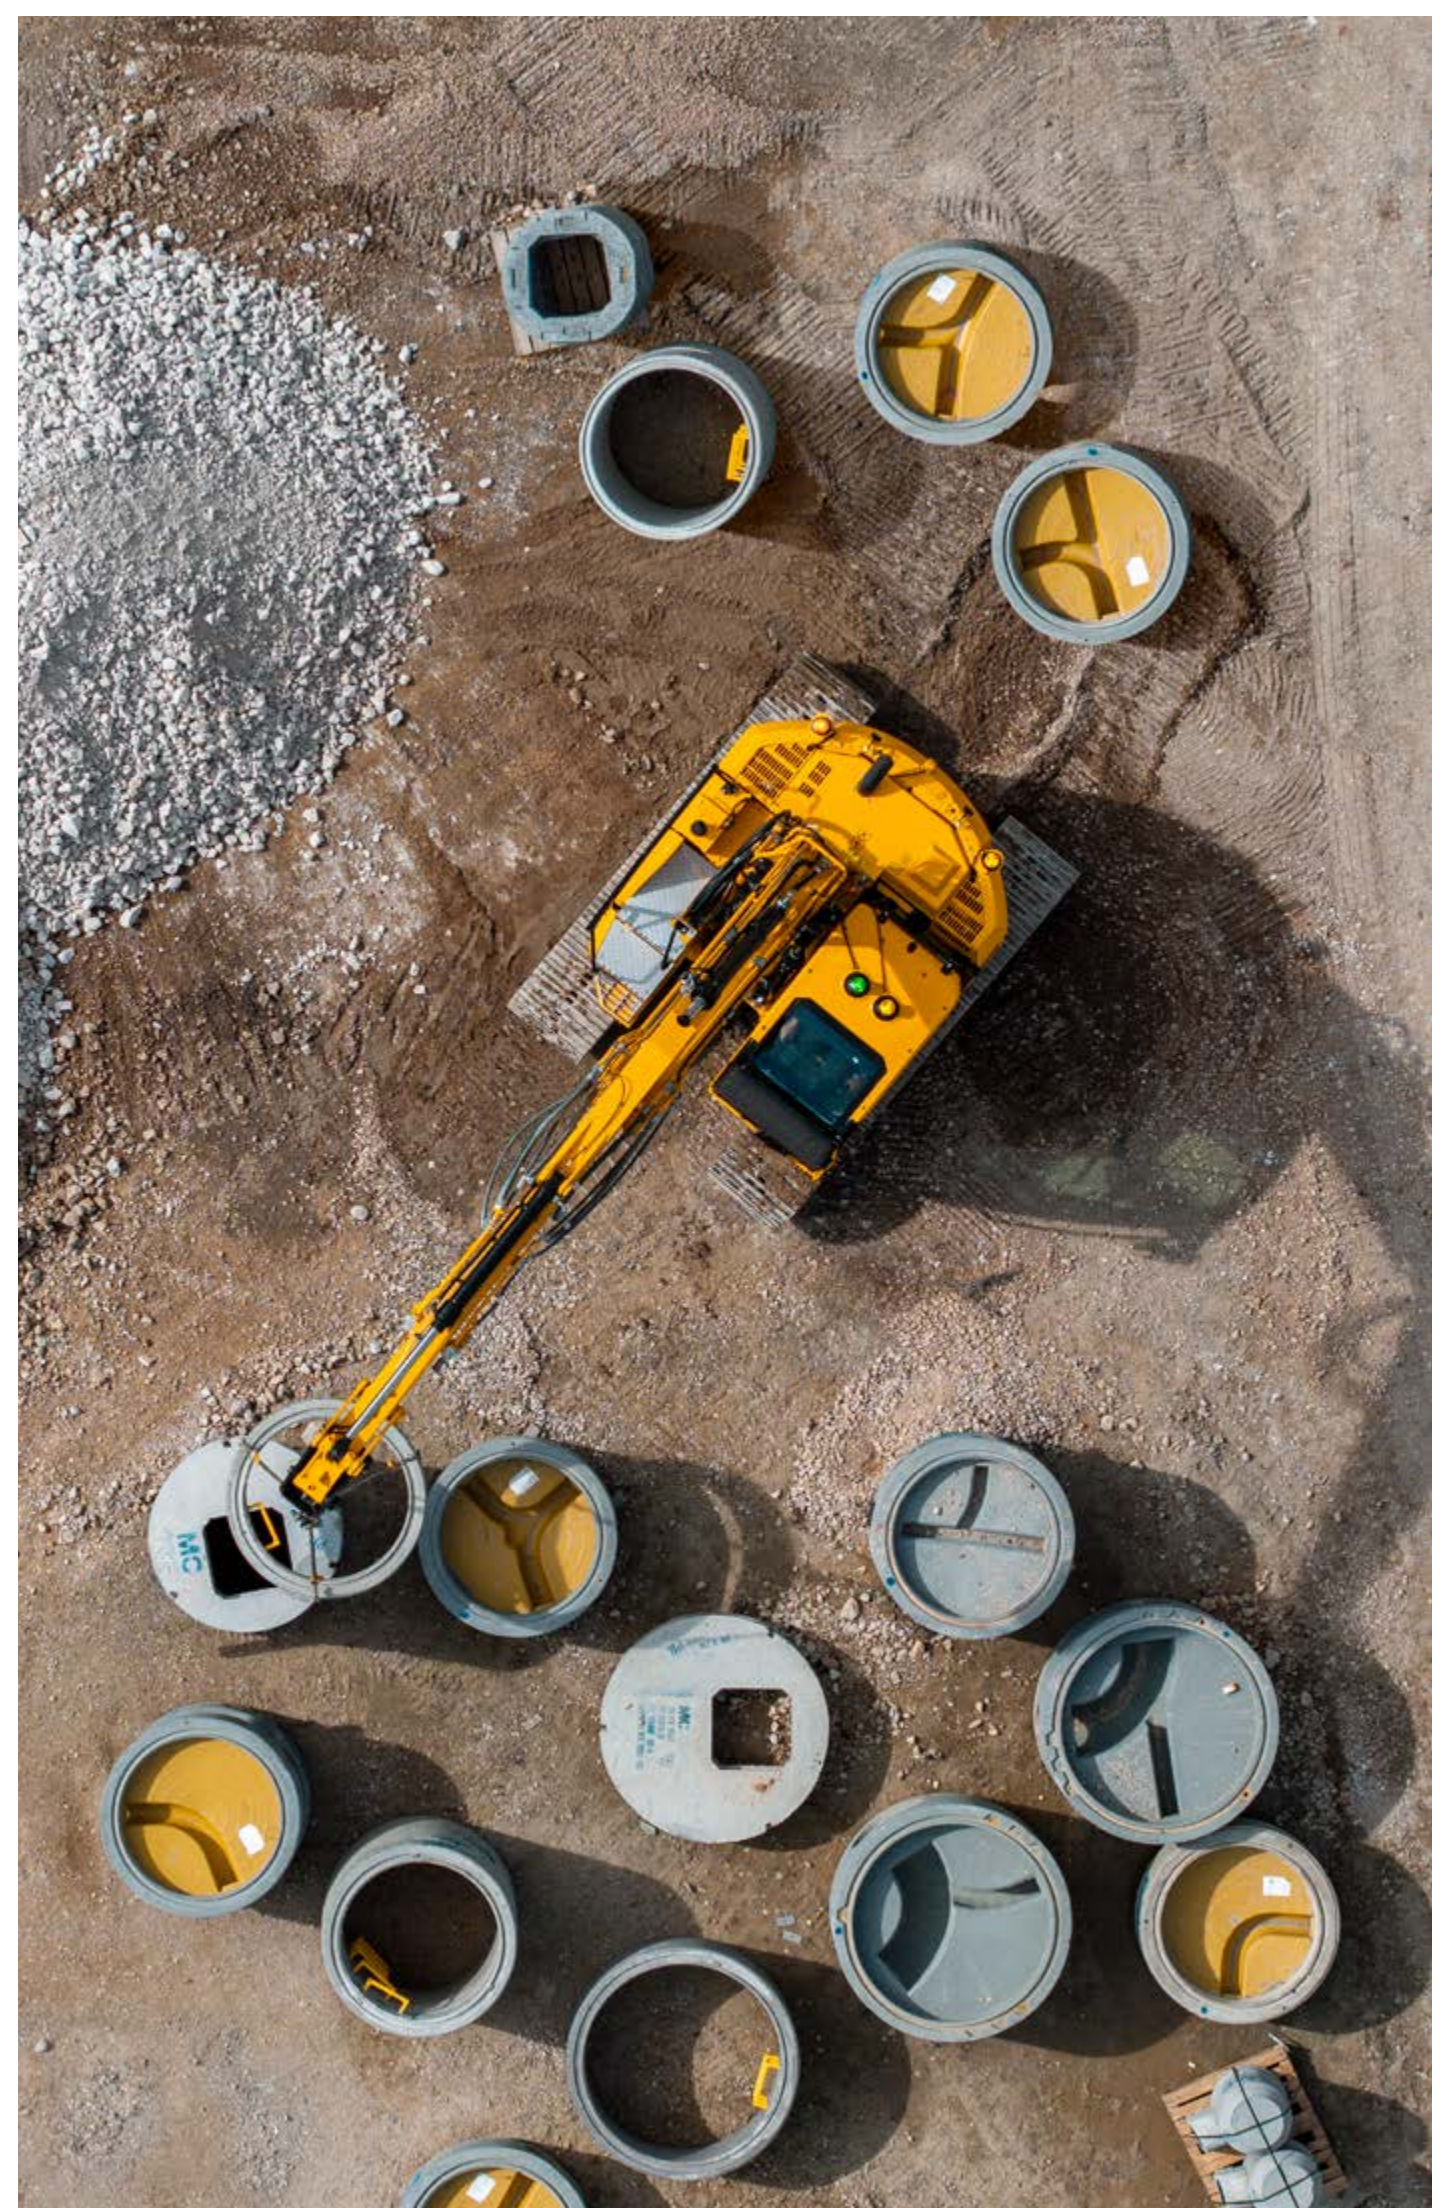

EXTRA PRODUCTIVITY

This machine features a larger bucket cylinder which boasts an impressive 104.5 kN tear out force.

EXTRAORDINARY DETAIL

The I45XR follows the same high quality X Series design ethos and utilises cutting-edge production facilities to bring you not just great excavators, but exceptional ones.



IMPROVED SERVICING

With improved ground level access, the I45XR design makes servicing safer and more convenient.

EXCELLENT CONTROL


Premium quality hydraulics deliver precise, efficient control. Customisable electro-proportional controls allow operators to set speed and attachment preferences.



EFFORTLESS WORKING

Twin HD cameras are fitted as standard and fully integrated into the latest JCB UX display.

360 degree cameras available as optional upgrade.

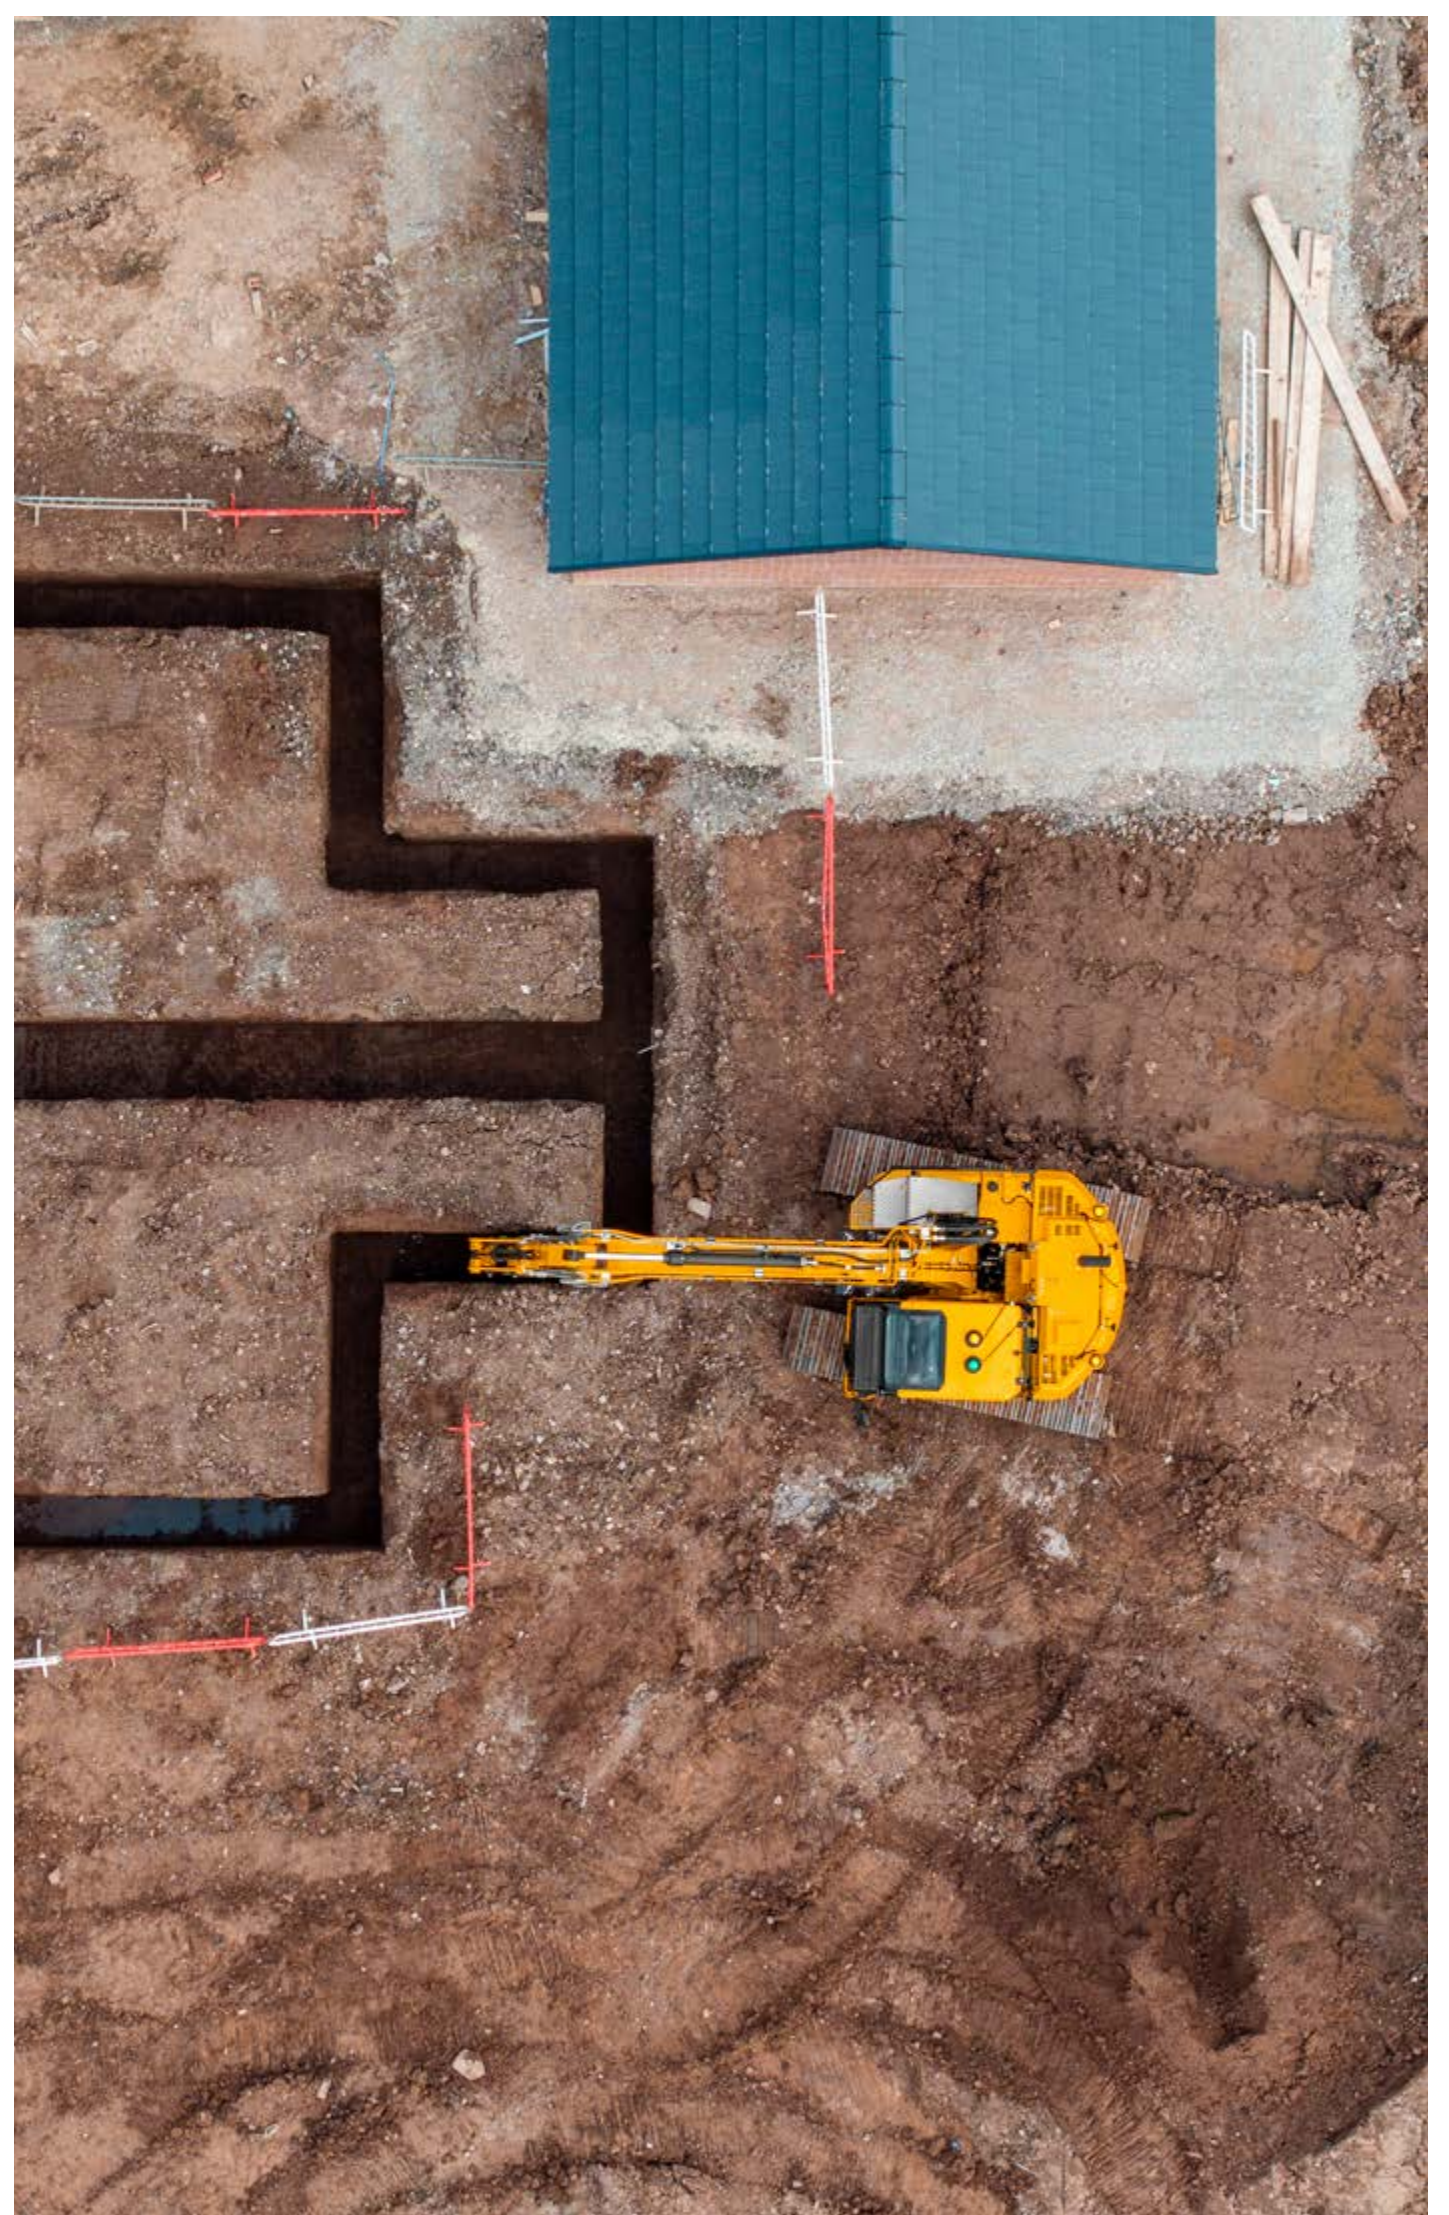

TRACKED EXCAVATOR | I45XR



SPECIFICATION

MODEL		I45XR MONO	I45XR TAB
Travel speed (high/low)	km/h	5.3 / 3.1**	
Tractive effort	kNm	127.5**	
Max digging reach*	mm	8,801	9,230
Max digging depth*	mm	6,027	6,167
Machine weight***	kg	14,750-16,859	16,142 - 17,359
Max bucket tearout*	kN	104.5	

*3m dipper. **Standard undercarriage. ***Figures include 0.59m³ bucket, operator 75kg, full fuel tank and 3m dipper, quarry handrails, FOPS guards.



STANDARD FEATURES

- JCB 448 DIESELMAX Stage V
 - Engine auto-stop and auto-idle
 - Keyless start
 - JCB UX operator experience
 - 10” colour touch-screen display
- High-definition twin cameras
 - Full-size CommandPlus cab
 - Bluetooth radio
 - Seat-mounted control pods
 - 5 years LiveLink subscription



THE NEW JCB I45XR TRACKED EXCAVATOR

**MINIMUM SWING,
MAXIMUM SPACE**

FIND OUT MORE



REQUEST A QUOTE



www.jcb.com

